

PRIME

ACCESSORIES



AN ISO 9001-2000 COMPANY




ACCESSORIES

OTHER ITEMS

Check Valve / Non-return Valves:

Non-return valves or check valves are made to precision of bubble free close. Heavy-duty corrosion resistance springs are used for longer life. End connection- 1/8" to 1" Male or Female threaded ends or double compression tube end.

Material of construction:
Brass, Stainless steel, Carbon steel, SS alloys and Aluminum. Pressure rating up to 6000 PSI.

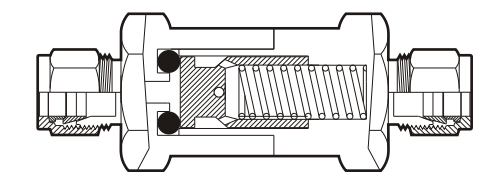

Pressure Gauge Accessories :

Syphon (Pig type, Ring type, U type) Gauge cock (2 way, 3 way), Snubber (Dampener), Gauge saver, Bleeder plug, Pressure gauge adaptors and reducers are available in SS 316/304.

Gauge saver



Gauge cock



Siphon




Bleeder Plug



Snubber




Oval Flange

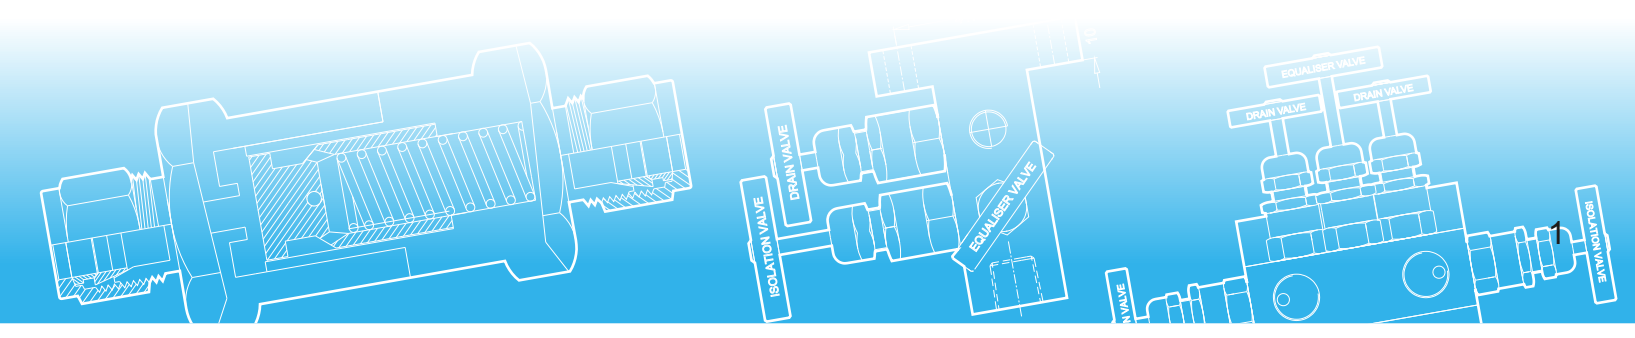

PIPE CLAMPS:

Pipe clamps with H.D.PE body, top and bottom steel plates and fasteners are used to clamp the piping system firmly on wall or system body. Clamping eliminates vibration and keeps the pipes neat and clean. It also protects fittings and connections from loosening or dismantling from the system. Size range: 1/4" to 2 1/2" pipe OD.



DISTRIBUTION AIR HEADER:

Air or gas supply needs to be distributed to various centralized field connections. It becomes cumbersome and often unsafe to lay complex piping network at site. We therefore have designed clean and neat instrument air distribution system with outlet connection nos.4, 5, 6,...20 or as per customer requirement. The outlets are provided with needle valves or ball valves. Inlets can be of flange end type, threaded type or with valve end.



CONDANSATE POT :

Use to condensate moisture in the process air, made in 3" and 4" sizes with 1/2" NPT(F) end connections. Material of construction: CS & SS alloys



Hose pipe with end fittings

High and low pressure rubber hose pipe assembly with various end connections (swivel end, banjo connection, be-nipple and flange connection) in SS, Brass and CS with various sizes (1/4" 2") with suitable adaptors as per your requirements. Also SS braided Teflon hose and SS braided bellows are also available



THERMOWELLS

'PRIME' offers a full range of custom made thermowell, designed to protect the temperature gauges from various corrosive media, pressure, and abrasives. They are designed to permit quick removal and easy fitment of thermometer for replacement, repair and testing.

FEATURES: Shank: Straight, Taper, Stepped. Mounting Style: Threaded, Socket weld, Flanged. Material of Construction: SS family, MS, Brass, Monel etc. Application: widely used for Bi-metal, Mercury, Gas filled thermometers sensors in various industries like paper and pulp, Food and beverage, chemicals, Petrochemicals, fertilizers and Power.

Straight Shank, threaded with or w/o Lag
Connection 1/2", 3/4", 1", Bore size: 0.385"

Stepped Shank, threaded with or w/o Lag
Connection 1/2", 3/4", 1", Bore size: 0.260"

Taper Shank, threaded with or w/o Lag
Connection 1/2", 3/4", 1", Bore size: 0.260", 0.385"

Weld-in Shank
Connection 1-1/2", Bore size: 0.260", 0385"

Socket weld Shank, with or w/o Lag
Connection 1/2", 3/4", 1", Bore size: 0.260", 0.385"

Flanged End connection
Connection: From 1" - 150# Flange onwards
Bore size: 0.260", 0385"

